Air King Central Vacuums®

OWNERS MANUAL

TABLE OF CONTENTS

Safety instructions	pg. 2
Grounding Instructions	pg. 3-4
Operating Your Vacuum	pg. 4
Tips on the Care of Your Central Vacuum	pg. 4-5
Maintenance	
- Inverted Bag Units	pg. 5
Troubleshooting Guide	pg. 6-8
Serial Number Location	pg. 8
Warranty	pg. 9
Explosion	pg. 10-11

IMPORTANT: CAREFULLY READ AND RETAIN THIS BOOKLET.

Downloaded from www.Manualslib.com manuals search engine

PRECAUTIONS

English

General Prohibitions Prohibition to Dismantle the Unit
Prohibition on Subjecting the Unit to Water General Precautions

⚠WARNING

(Negligence could result in death or serious injury to people)

1. High voltage is present internally. Do not open the case. Electric shock could result.
2. Do not dismantle or alter the unit. Fire or electric shock could result.
3. Do not connect any power source other than specified to terminals +,- nor install two power supplies in parallel to single input. Fire or damage to the unit could result.
4. Keep the unit away from water or any other liquid. Fire or electric shock could result.
5. Do not put any metal into the unit through the openings. Fire or electric shock could result.
6. When existing chime wiring is used, it is possible that it contains AC power. Unit damage or electric shock could result. Ask a qualified electrician.
7. Do not puncture the LCD panel with a sharp-edged tool. Damage to the LCD panel could occur, causing a liquid crystal spill. If liquid crystal makes contact with the eyes or mouth, immediately wash away with water.
8. Do not put high pressure on the monitor cover. If fractured, injury could result.
9. Do not use a power supply with a voltage other than specified. Fire or electric shock could result.

⚠CAUTION

(Negligence could result in injury to people or damage to property)

1. Before turning on the power, make sure wires are not crossed or shorted. Fire or electric shock could result.
2. Mount the unit onto the wall in a place where it cannot be easily jarred or bumped by people. Injury could result.
3. Do not make any wiring connections while the power supply is turned on. Electric shock or unit trouble could result.
4. Do not install or use the unit in any of the following places.
   * Places in direct sunlight, or near heating equipment that varies in temperature.
   * Places subject to metal particles, dust, oil, chemicals.
   * Places subject to moisture and humidity extremes, such as bathrooms, cellars, greenhouses, etc.
   * Places where the temperature is quite low, such as inside a refrigerated area or in front of an air-conditioner.
5. Do not cover the unit with a cloth, etc. Fire or unit trouble could result.
6. Use Aiphone Power Supply or specified one by Aiphone. If not used, it may be a possible cause of fire or malfunction.

GENERAL PRECAUTIONS

1. This unit is for indoor use only. Do not use outdoors.
2. When wall-mounted, the unit may become black and sooty. This does not indicate unit trouble.
3. In areas where broadcasting station antennas are close by, the intercom system may be affected by radio frequency interference.
4. The unit may become a little warm with use, but this is not a malfunction.
5. If a cellular phone is used close by, the unit may malfunction.
6. It must be noted in advance that the LCD panel, though manufactured with very high precision techniques, inevitably will have a very small portion of its picture elements always lit or not lit at all. This is not considered a unit malfunction.
7. Keep the unit more than 1 m away from Radio or TV set.
8. If the monitor station is operated near office equipment, radios or TVs, it will be affected by radio wave interference or noise. Carefully select the place of use.
9. Ambient noise around the unit may prevent normal communication. This is not unit trouble.
10. As to other manufacturer's devices, such as sensor, used with this system, comply with the relative specifications and warranty conditions of the devices.
11. If the system is down or does not operate properly, turn off the unit power switches.

1 PACKAGE CONTENTS

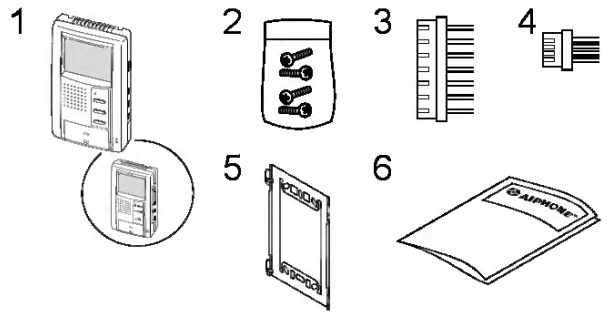

Package contents English

1. JB-2MD or JB-2MED or JB-2HD
2. Packet of screws
3. Connector for optional features
4. Door release connector (JB-2MD or JB-2MED only)
5. Mounting bracket
6. INSTALLATION & OPERATION MANUAL

2 INSTALLATION

2-1

1

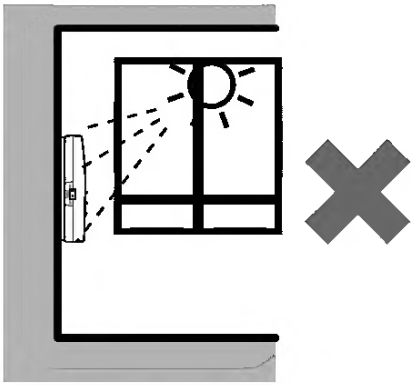

2

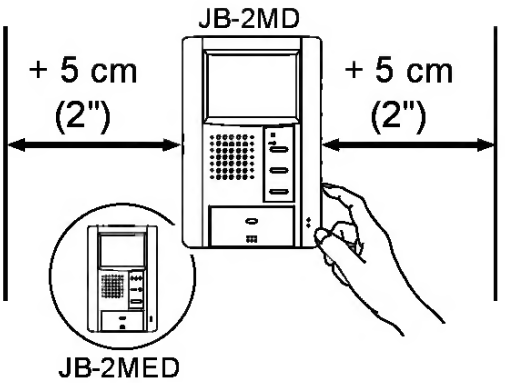

Downloaded from www.Manualslib.com manuals search engine

PRECAUTIONS

- Do NOT install the unit in a location where it may be subjected to:
  — Direct sunlight or other sources of excessive heat
  — Fluid, rain or moisture
  — Excessive dirt or dust
  — Excessive vibration
- This unit is designed to be operated on a 12-volt DC negative-ground electrical system only.
- Choose the mounting location carefully so that the unit will not interfere with normal driving functions.
- Before making connections, disconnect the ⊖ terminal of the car battery to avoid short circuiting.

Notes on CDs

- A defective or soiled disc stored in the disc magazine can cause the sound to drop out during play.
- Always handle a disc by holding its inner and outer edges.

- Do NOT touch the surface of the unlabeled side of the disc.
- Do NOT attach paper or tape etc. to a disc.

- Do NOT expose the discs to direct sunlight or excessive heat.



- Clean the discs before inserting them into the disc magazine. Always clean a disc from the center outward with a cleaning cloth.

- There may be burrs left on the inner and outer edges of a brand-new disc. The burr may cause the malfunction of the unit or sound drop-out. To prevent these problems, if the burr is left on the disc, be sure to remove them with a ball-point pen, etc. as illustrated.

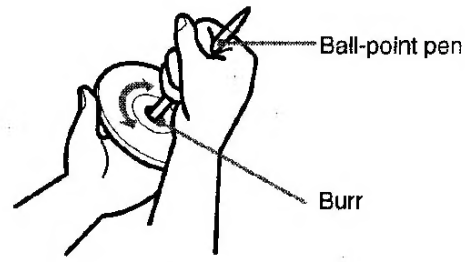

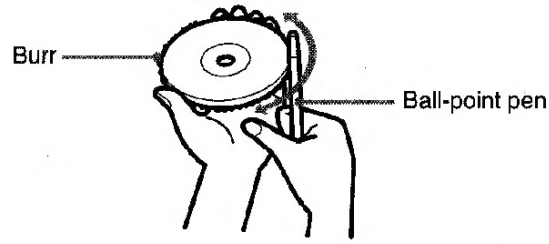

- NEVER use solvents such as benzine or alcohol to clean a disc.
- You cannot play an 8-cm (3-inch) CD — even with the specially designed adaptor.
- Do NOT use irregular shape CDs (example: heart-shaped, octagonal ones).
  It may result in malfunction.

Notes on the disc magazine

- Do NOT leave the disc magazine in a place subject to excessive temperature or humidity.
- Do NOT insert more than one disc per slot.
- Do NOT drop the disc magazine.

Downloaded from www.Manualslib.com manuals search engine

Step1.2: If you need better performance, please choose **Optimize for performance mode** to enable **Tx Burst mode**. Or you can choose **Optimize for WiFi mode** to run in standard wireless network.

Step2: Click **Install** to begin the installation.

Step3: After the setup wizard has successfully installed wireless LAN, click **Finish** to exit the wizard.

2.3.2 For Windows Vista

Step1: Please read the following license agreement. Select **I accept the terms of the license agreement** and click **Next** to continue.

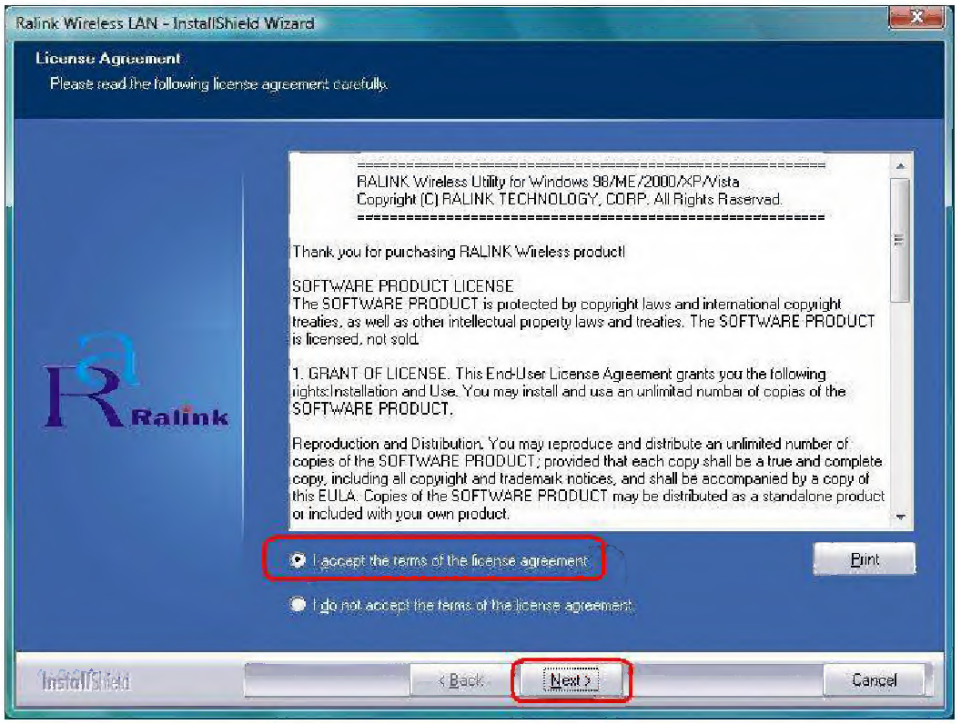
Ralink Wireless LAN - InstallShield Wizard
License Agreement
Please read the following license agreement carefully.
RALINK Wireless Utility for Windows 98/ME/2000/XP/Vista
Copyright (C) RALINK TECHNOLOGY, CORP. All Rights Reserved.
Thank you for purchasing RALINK Wireless product!
SOFTWARE PRODUCT LICENSE
The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.
1. GRANT OF LICENSE. This End-User License Agreement grants you the following rights:Installation and Use. You may install and use an unlimited number of copies of the SOFTWARE PRODUCT.
Reproduction and Distribution. You may reproduce and distribute an unlimited number of copies of the SOFTWARE PRODUCT; provided that each copy shall be a true and complete copy, including all copyright and trademark notices, and shall be accompanied by a copy of this EULA. Copies of the SOFTWARE PRODUCT may be distributed as a standalone product or included with your own product.
I accept the terms of the license agreement
I do not accept the terms of the license agreement
Print
InstallShield
< Back
Next >
Cancel

Step2: Click **Install** to begin the installation.

Step3: After the setup wizard has successfully installed wireless LAN, click **Finish** to exit the wizard.

2.4 For detailed information of Device Driver & Utility installation, please refer to the user's manual included in the Installation CD.

Downloaded from www.Manualslib.com manuals search engine

Description

Front Panel

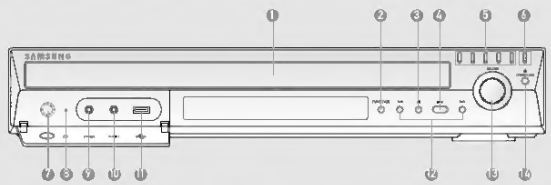

1. Disc Tray
2. Function button
3. Stop (■) button
4. Play/Pause (▶II) button
5. Direct Play buttons
6. Disc Change button
7. Power (⏻/I) button
8. Standby Indicator
9. Headphone Jack
10. AUX IN 1 Jack
11. USB Port
12. Tuning Up & Skip (▶▶I) button
    Tuning Down & Skip (I◀◀) button
13. Volume Control
14. Open/Close button

Display

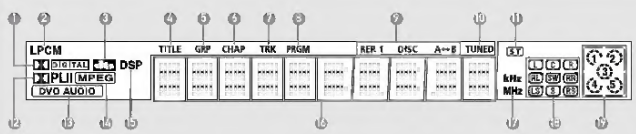

1. DOLBY DIGITAL indicator
2. LINEAR PCM indicator
3. DTS indicator
4. TITLE indicator
5. GROUP indicator
6. CHAPTER indicator
7. TRACK indicator
8. PROGRAM indicator
9. REPEAT indicator
10. TUNED indicator
11. STEREO indicator
12. DOLBY PLII indicator
13. DVD AUDIO indicator
14. MPEG indicator
15. DSP indicator
16. System Status Display
17. RADIO FREQUENCY indicator
18. SPEAKER indicator
19. DISC(1~5) indicator

Rear Panel

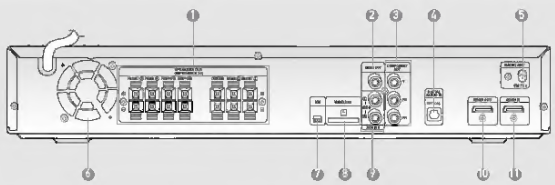

1. 5.1 Channel Speaker Output Connectors
2. Video Output Jack
   Connect your TV's Video Input Jack (VIDEO IN) to the VIDEO OUT Jack on this unit.
3. Component Video Output Jacks
   Connect a TV with Component video inputs to these jacks.
4. External Digital Optical Input Jack
   Use this to connect external equipment capable of digital output.
5. FM 75Ω COAXIAL Jack
6. Cooling Fan
7. XM Antenna Jack
8. TX Card Connection(WIRELESS)
9. AUX IN 2 Jacks
10. HDMI Output Jack
11. HDMI Input Jack

Accessories

Remote Control | Video Cable | FM Antenna | User's Manual

Downloaded from www.Manualslib.com manuals search engine

Installation

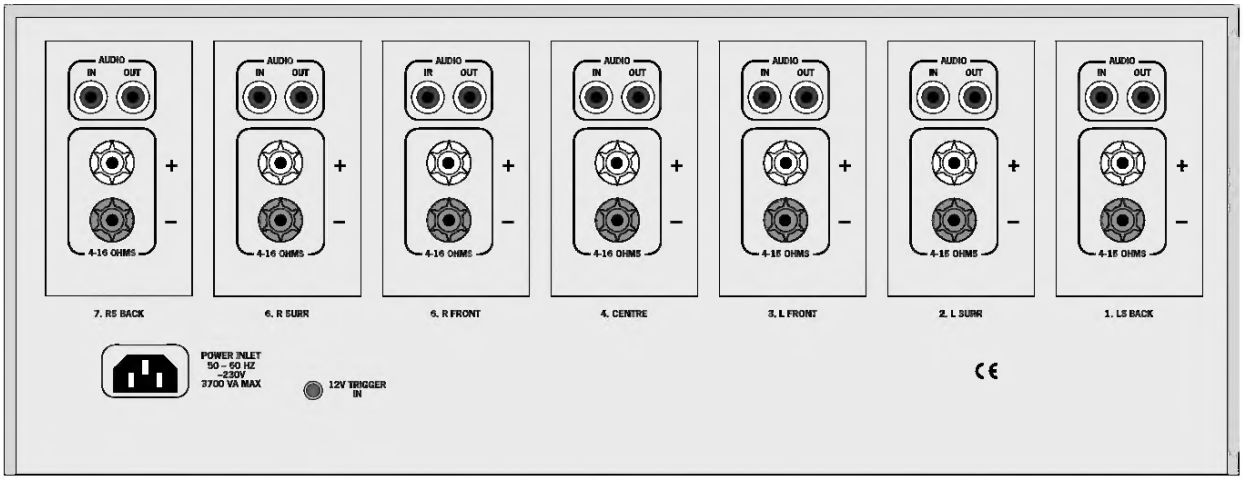

POSITIONING THE UNIT

- Place the amplifier on a level, firm surface.
- Avoid placing the unit in direct sunlight or near sources of heat or damp.
- Do not place the unit on top of a power amplifier or other sources of heat.
- Ensure adequate ventilation.

  The P7 has a variable speed fan for cooling. If the unit is placed in an enclosed space, such as a bookcase, equipment rack or cabinet, ensure that there is adequate space and ventilation in the enclosure for air to flow through the ventilation slots and cool the amplifier. Inadequate cabinet ventialtion may cause the P7 to shut down due to thermal overload.

  The amplifier is designed to run warm during normal operation.
- Ensure that the equipment rack or stand can support the 31kg weight of the unit.

CONNECTING TO A PRE-AMPLIFIER

ANALOGUE AUDIO INPUTS

It is imperative to connect the pre-amplifier outputs to the module for that particluar channel, e.g. connect the left surround output to the module that will be driving the left surround speaker.

All modules are identical, however, we advise you to make connections corresponding to rear panel labelling, since the amplifier modules are muted in pairs. Due to the layout of the power supply circuitry in the P7, you should connect the correct input signal and loudspeaker to the recommended channel, or the left/right stereo imaging will not be optimum.

The outputs from the pre-amplifier should be connected to the **AUDIO IN** inputs on the P7. Be sure to note which channel from the pre-amplifier is connected to which power amplifier module, so that the correct speaker can be connected to that module and the correct channel identity can be maintained.

If you wish to use four modules to bi-amplify a pair of speakers, or would like to bi-amplify using another power amp, then you can take the signal for that channel and feed it on to the additional modules using the **AUDIO OUT** phono socket on that module. The signal is then fed in to the first module, but also fed on to the second module so that both modules can bi-amplify the loudspeaker.

12V TRIGGER INPUT

If your pre-amp provides a 12V Trigger output, it can be connected to the **12V TRIGGER IN** socket using a 3.5mm jack. This enables the P7 to be turned on remotely from the pre-amp.

Note that the trigger input is only active when the central power button on the front panel is depressed.

Downloaded from www.Manualslib.com manuals search engine

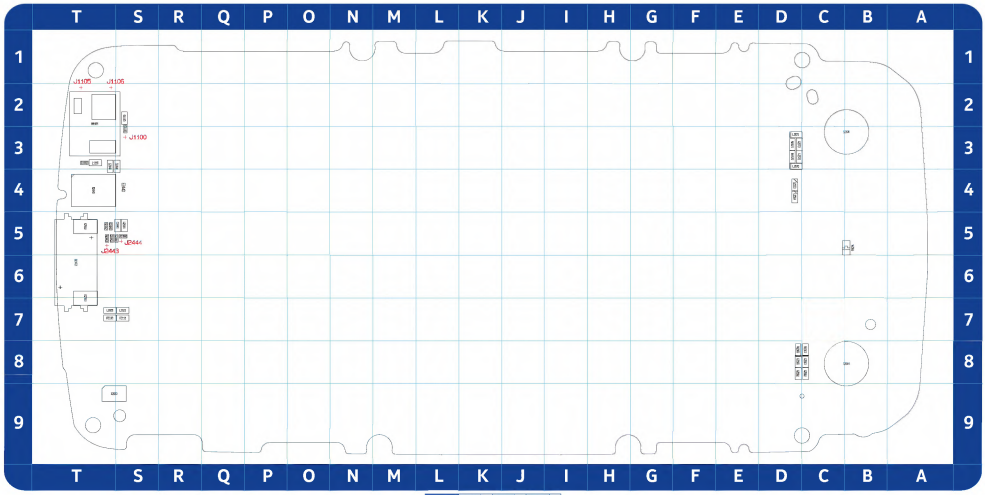

B		E2103	T7	L2563	C8	R2560	D8
R2103	T8	E2440	S4	L2570	D3	R2561	C8
C		**L**		L2571	D3	R2570	D3
C1115	S3	L1116	T3	L2572	D3	R2571	D3
C1118	T3	L2100	T7	L2578	D3	**S**	
C2440	S3	L2101	S7	**M**		S2554	B8
C2441	S5	L2440	T3	N1105	T2	S2570	B3
C2442	T5	L2441	S3	**R**		**V**	
C2443	T5	L2503	D4	R2110	T7	V2500	B5
C2444	S5	L2504	D4	R2111	S7	**X**	
E		L2560	D8	R2442	T5	X2060	T9
E1115	S2	L2561	C8	R2443	T5	X2440	T4
E2102	T5	L2562	D8	R2444	S5		

Nokia Internal Use only | Copyright © 2012 Nokia, Only for training and service purposes

CONNECTING THE POWER CORD

- Check first to make sure that the power cord you use is the correct type required for your area.
- This monitor has a universal power supply that allows operation in either 100/120V AC or 220/240 V AC voltage area. No user-adjustment is required.
- Plug one end of the power cord to the AC Inlet, plug another end to a proper AC outlet.
- For unit using at 120 V AC:
  Use a UL Listed Cord Set, Type SVT wire and plug rated 10 A/125 V.
- For unit using at 220/240 V AC (outside of U.S.):
  Use a Cord Set consisting of H05VV-F cord and plug rated 10 A, 250 V. The cord set should have the appropriate safety approvals for the country in which the equipment will be installed.

SAFETY PRECAUTION

- Avoid placing the monitor, or any other heavy object, on the power cord to avoid damage to the cable.
- Do not expose the monitor to rain, excessive moisture, or dust.
- Do not cover the ventilation slots or openings of the monitor. Always put the monitor in a place where there is adequate ventilation.
- Avoid placing the monitor against a bright background or where sunlight or other light sources may reflect on the face of the monitor. Place the monitor just below eye level.
- Handle with care when transporting the monitor.
- Refrain from giving shock or scratch to the screen, as screen is fragile.

CLEANING YOUR MONITOR

Please carefully follow the below guidelines when cleaning the monitor.

- Always unplug the monitor before cleaning.
- Use a soft cloth to wipe the screen and cabinet front and sides.

Downloaded from www.Manualslib.com manuals search engine

(B) DAW CONTROL: CHANNELS

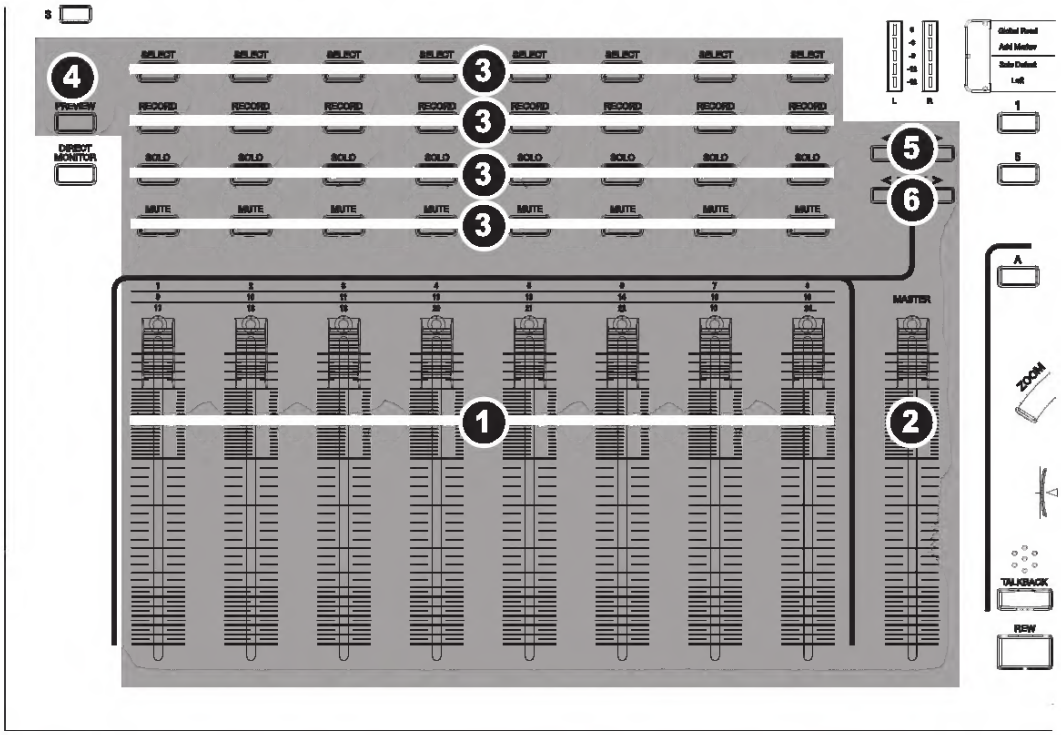

1. **CHANNEL FADER** – Use this 100mm, touch-sensitive fader to adjust the volume levels of each channel. The exact level will be shown in the DISPLAY.

2. **MASTER FADER** – This fader controls the DAW's master fader. Note that different DAWs control this fader differently. Some DAWs, such as Pro Tools, do not make use of the fader at all.

3. **SELECT / RECORD / SOLO / MUTE** – These buttons control the corresponding functions in your DAW.

4. **PREVIEW** – Using this button to keep from becoming "lost" on the control surface. Press and hold PREVIEW and manipulate a control to see its operation and, if applicable, the DAW project's corresponding track name on the LCD display. As long as PREVIEW is held down, communication with the DAW will be suspended for most controls.

5. **< BANK >** – Use these buttons to move through your DAW project's channels in banks of eight. The first and last fader assignments for the selected bank will be shown in the DISPLAY.

6. **< TRACK >** – Use these buttons to move through your DAW project's channels one at a time.

Downloaded from www.Manualslib.com manuals search engine

How to connect an alternativa plug

The wires in this mains lead are coloured in accordance with the following code:

BLUE	**"NEUTRAL" (N)**
BROWN	**"LIVE" (L)**
GREEN AND YELLOW	**"EARTH" (E)**



Disposing of the appliance

When disposing of the appliance please remove the plug by cutting the mains cable as close as possible to the plug body and dispose of it as described above.

Technical Specifications

Inner Dimensions of the Oven:

Width - 40 cm
Depth - 39 cm
Height- 34 cm

Inner Volume of the Oven:

53 Liters

Energy Consumption:

To reach 200°C: 0.45 kWh
To maintain the temp. at 200°C for 1 hour: 0.95 kWh
Total: 1.40 kWh

Voltage and Frequency of Power Supply:

230-240V / 50Hz / 2900W

CE

This appliance conforms with the following European Economic Community directives:

- 73/23/EEC of 19/02/73 (Low Voltage) and subsequent modifications;
- 89/336/EEC of 03/05/89 (Electromagnetic Compatibility) and subsequent modifications;
- 93/68/EEC of 22/07/93 and subsequent modifications.

Downloaded from www.Manualslib.com manuals search engine

Downloaded from www.Manualslib.com manuals search engine

TAPE PLAYBACK

Press the following buttons to operate tape transport.

To do this	Press this button
Eject the cassette	⏏
Change the playback side Stop fast-forwarding or rewinding and resume playback	DIR
Fast-forward either side of the tape	FF ▲
Rewind either side of the tape	▼ REW
Stop the tape and turn the unit off	MUTE (for more than 2 seconds)

- At the end of the tape in Fast Forward mode, the other side of the cassette will start playing automatically.
- At the end of the tape in Rewind mode, the same side will start playing automatically.

Direction indications

FWD	Displayed when the upper side of the cassette is being played.
REV	Displayed when the lower side of the cassette is being played.

Tape transport display

When you start tape playback, the transport display indicates the tape movement.

Upper side: During playback, fast-fowarding Lower side: During rewinding	
Lower side: During playback, fast-fowarding Upper side: During rewinding	

During fast-forwarding or rewinding, the transport display accelerlates.

Before turning the ignition off

Be sure to eject any cassette from the unit before turning the ignition off.

Switching modes

When the unit is in Radio or CD Changer Play mode, inserting a cassette switches the unit to Tape Play mode automatically.

To prevent tape problems

Before inserting a cassette into the unit, make sure that there is no slack in the tape. If necessary, take up the slack by inserting a pencil into the spindle hole and winding.

Tapes of 90 minutes or longer are extremely thin and easily deformed or damaged. They are not recommended.



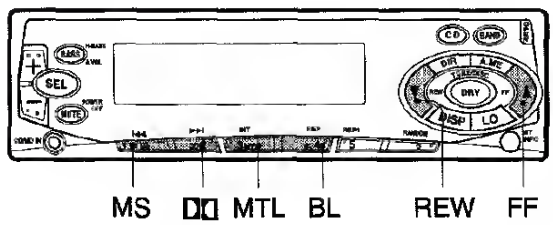

To play tapes recorded with Dolby B NR

Press DOLBY NR (the Dolby NR button) when playing a tape recorded in this mode. The "DOLBY NR B" indicator lights up.

Press this button again to cancel this mode.

Note

If a tape recorded without Dolby B NR is played back in Dolby B NR mode, the sound will not be reproduced properly

To play metal tapes

Press MTL (metal) when playing a metal or CrO_2 tape. The "MTL" indicator lights up.

Press this button again to cancel this mode.

Downloaded from www.Manualslib.com manuals search engine

5-3 SOFTWARE FLOW CHART

I. Power-On Subroutine CHART

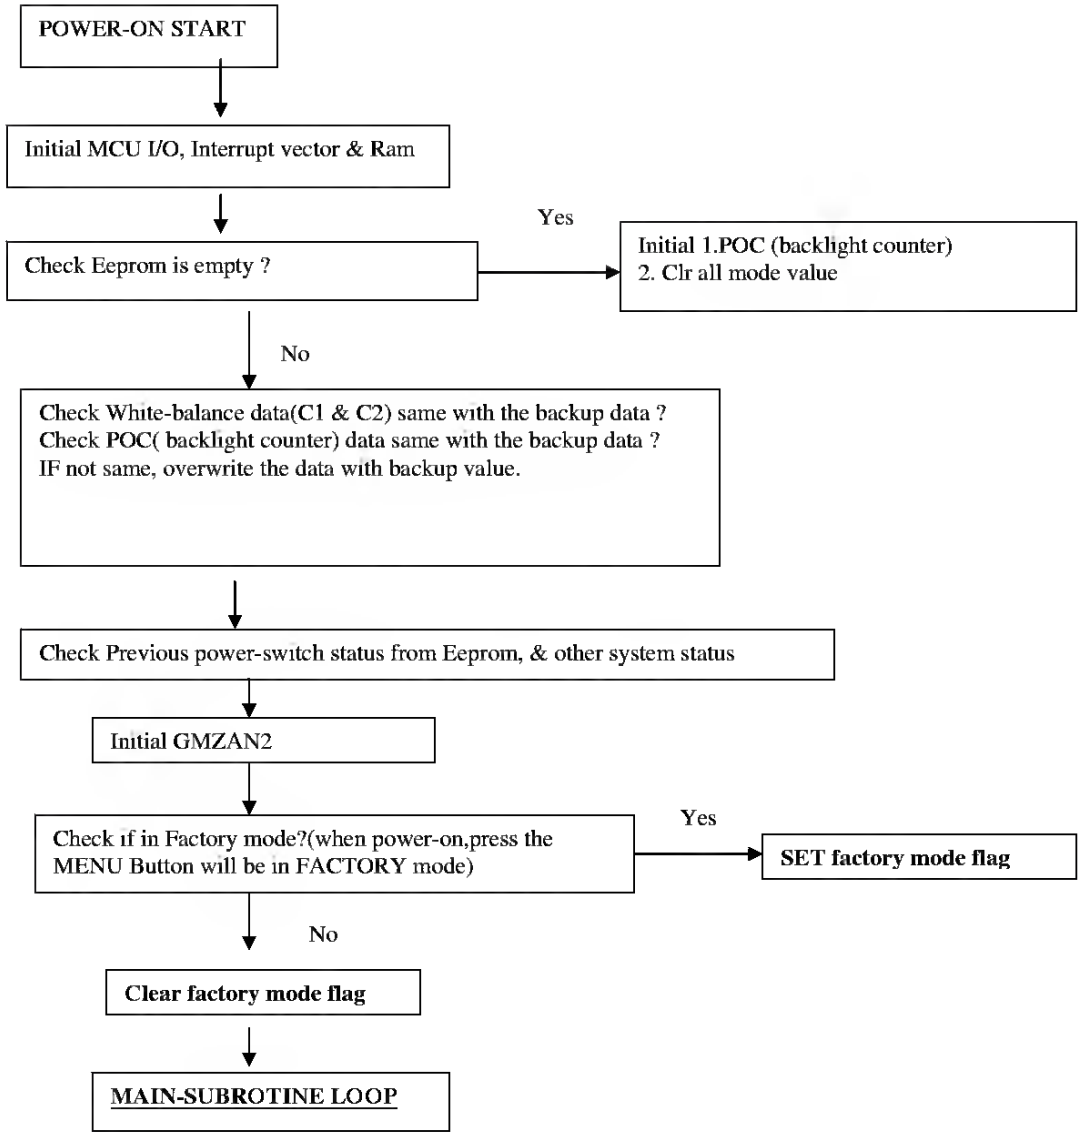
POWER-ON START
Initial MCU I/O, Interrupt vector & Ram
Check Eeprom is empty ?
Yes
Initial 1.POC (backlight counter)
2. Clr all mode value
No
Check White-balance data(C1 & C2) same with the backup data ?
Check POC(backlight counter) data same with the backup data ?
IF not same, overwrite the data with backup value.
Check Previous power-switch status from Eeprom, & other system status
Initial GMZAN2
Check if in Factory mode?(when power-on,press the MENU Button will be in FACTORY mode)
Yes
SET factory mode flag
No
Clear factory mode flag
MAIN-SUBROTINE LOOP

Downloaded from www.Manualslib.com manuals search engine

HP Website

The HP website has information on this product as well as the latest drivers and flash ROM images. You can access the HP website at www.hp.com.

Authorized Reseller

For the name of the nearest authorized reseller:

- In the United States, call 1-800-345-1518.
- In Canada, call 1-800-263-5868.
- Elsewhere, see the HP website for locations and telephone numbers.

Reader's Comments

HP welcomes your comments on this guide. Please send your comments and suggestions by e-mail to `ServerDocumentation@hp.com`.

Step 3 Click on the **Print Test Page** button. Windows should print out a test page.

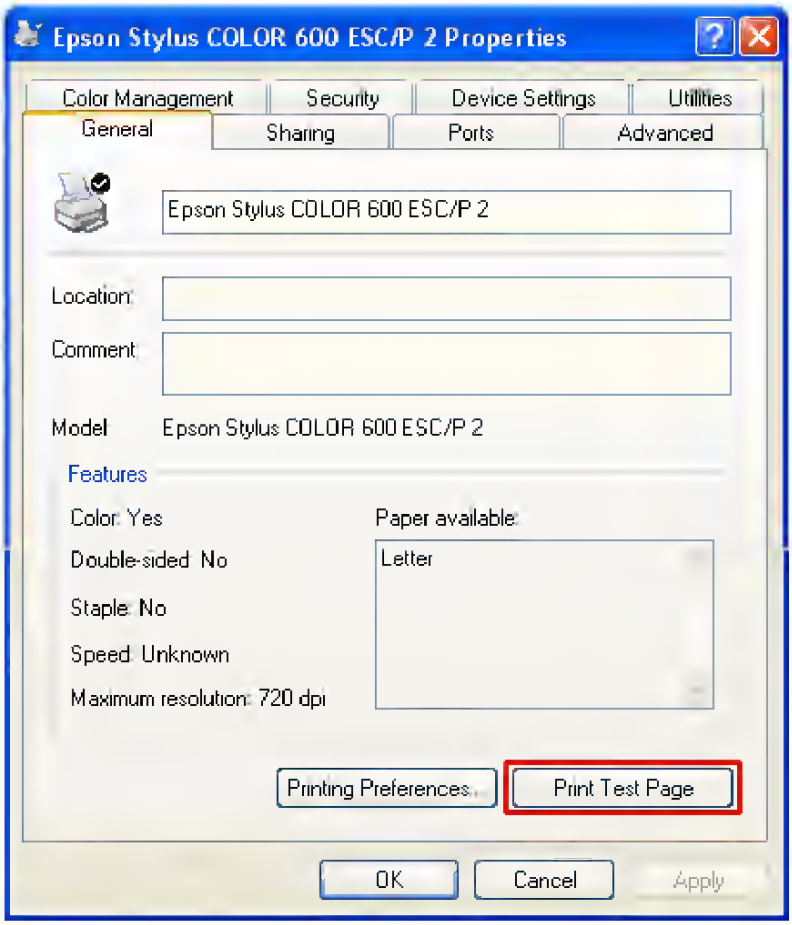

You have successfully configured the Print Server for printing.

Downloaded from www.Manualslib.com manuals search engine

6.1.4 Advanced Routing

You can configure your own static routing table using the Advanced Routing function.

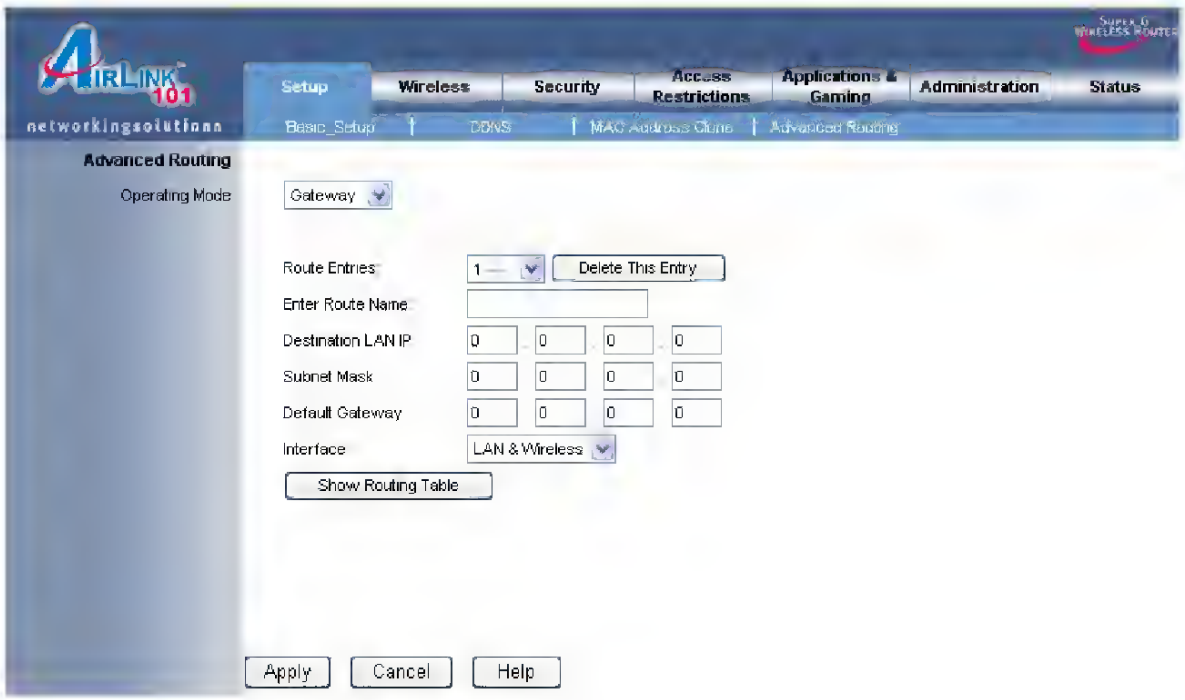

To see the current routing table, click on **Show Routing Table** button.

Be sure to click **Apply** and **OK** to save each entry.

Downloaded from www.Manualslib.com manuals search engine

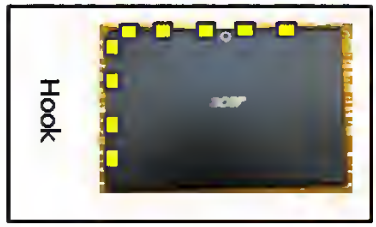

3. Hold the cover and take off the cover base on the axis of LCD cover up side.

4. Take off the battery

   Remove the screw and Tear off the tap on connector, and separate the battery connector, and pulling two side of battery sticker.

PORTS & CONNECTORS

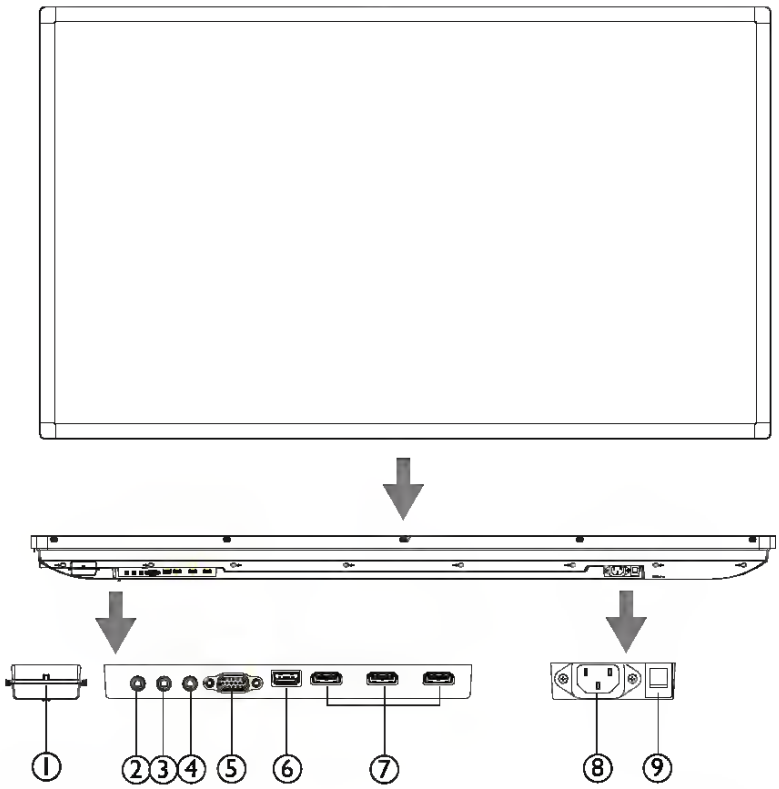

①	**Remote control sensor and Power Indicator**	Receives the signal from the remote control. See also "USING THE REMOTE CONTROL" on page 18. When the display is in active use the power indicator illuminates GREEN. When the display is powered off it illuminates RED. When a component failure is detected, the indicator will blink RED.
②	**IR IN**	Connects to an external IR sensor module to the display.
③	**AUDIO OUT**	Connects to external speakers, audio amplifiers, etc. or outputs the signal that is supplied to the AUDIO IN connector.
④	**AUDIO IN (LINE IN)**	Connects with the audio out connector of a video source such as a computer, VCR, or DVD player when the display is connected to the source via the **D-SUB** connector.
⑤	**D-Sub (VGA IN)**	Connects with the analog video output (VGA) of a computer or other RGB equipment. This input can be used with an RGB or COMPONENT source.
⑥	**USB port**	Connects to a personal computer or USB 2.0 device to display digital media.
⑦	**HDMI IN**	Connects with devices supporting audio/video data using the digital HDMI interface.
⑧	**AC IN connector**	Connects with the supplied power cord.
⑨	**AC SWITCH**	Switches the main power of the display ON/OFF.

Downloaded from www.Manualslib.com manuals search engine

Service

Should you be unable to locate the cause of the problem in spite of the above check list, please contact your AEG Service Department, quoting the E and F numbers, or the KD number which you will find on the rating plate (see illustration/arrow).

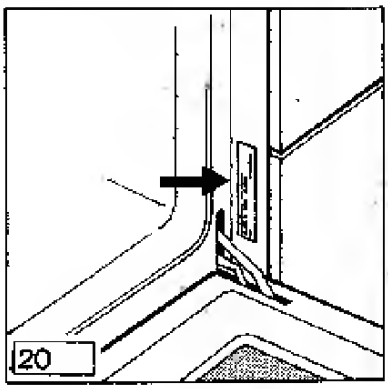

Please transfer these numbers to the space provided below for your convenience.
These numbers enable the Service Department to prepare as far as possible any spare parts required to rectify the fault on first call. This may save you money.

E-No. .....

F-No. .....

KD ... ... – ... /

AEG Service in the United Kingdom

AEG Domestic Appliances Limited
Head Office:
217 Bath Road
Slough, Berks SL1 4AW
Tel.: 0 17 53 87 25 06
Telefax: 0 17 53-51 22 71

AEG Northern Service Centre:
Unit 20, Haigh Park
Haigh Avenue
Stockport
Gt. Manchester SK4 1QR
Tel.: 01 61-4 87 22 05
Telefax: 01 61-4 74 11 91

AEG Scottish Service Centre: Block 11, Unit 1
Dundyvan Industrial Estate
Coatbridge
Lanarkshire ML5 4AQ
Tel.: 0 12 36-44 03 87
Telefax: 0 12 36-44 02 56

Service Appointments:
Bristol: 0 11 79-25 28 80
Norfolk: 0 16 03-76 55 15

KD900-4 09/94 UK

Downloaded from www.Manualslib.com manuals search engine

Notification and status area

Notification and status icons are shown at the top of the screen. The top-right area displays a variety of status information, such as Wi-Fi connectivity, signal strength, battery status, and time. The top-left area displays event icons, such as a new message.

Drag the **Notification** area down the screen to view more information about new events. Tap the down arrow on the far right to access *Quick Settings*.

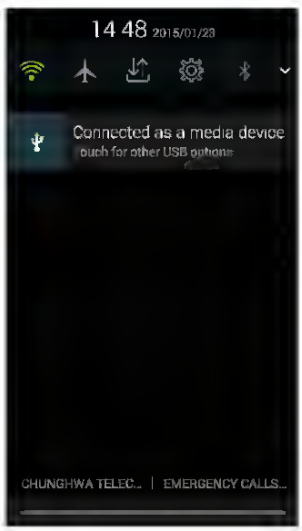

Downloaded from www.Manualslib.com manuals search engine

No.	Icon	Color	Description
6		Green	PS/2 mouse port
7			System fan 2
8		Black	Network port
9		Black	Rear USB ports
10		Burgundy	Parallel/printer port
11		Teal or turquoise	Serial ports
12			Keyhole
13		Lime	Audio-out/Line-out port
14		Gold	Game/MIDI port
15		Light blue	Audio-in/Line-in port
16		Black	Microphone-in port
17		Blue	Monitor/VGA port
18			Expansion slots

Downloaded from www.Manualslib.com manuals search engine

18 SmartLock Access Code

Over the next few pages you'll learn how to block programs and understand the rating terms for certain broadcasts. First, set a personal access code.

1. **Press MENU** to see the menu.
2. **Press ▲ or ▼** until **SMART-LOCK** is highlighted.
3. **Press ▶ again.** The on-screen display will read "**ACCESS CODE ----.**"
4. **Use the Number buttons to enter 0711. "XXXX"** appears on the screen as you press the Number buttons.
   When 0711 is entered correctly, proceed to step 6.
   If you enter a wrong digit, **"INCORRECT CODE"** will appear on the screen. You will be asked to "PLEASE ENTER AGAIN." Enter 0711 again.
5. **Press ▼** until **CHANGE CODE** is highlighted.
6. **Press ▶** to change your personal Access Code.
7. **Enter a new four-digit code using the Number buttons.** The screen will ask you to confirm the code you just entered. **Enter the same new code again. "XXXX"** will appear when you enter your new code.
   After confirming the new code, the on-screen menu will return to the BLOCK option. Continue through the next few pages to learn how to block program ratings.

   Or, press STATUS/EXIT to remove the menu.

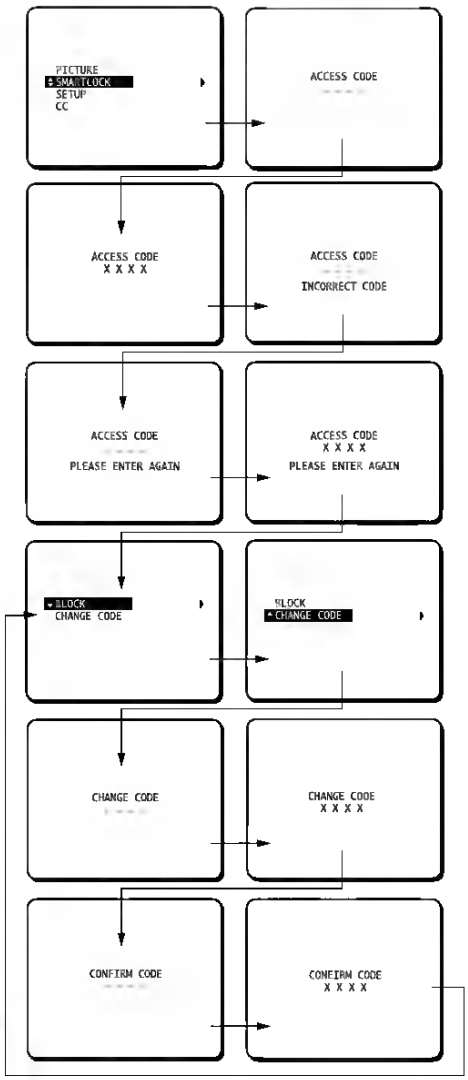

NOTE: If you ever forget your code, the 0,7,1,1 code is the factory default and can be used to enter and create a new one.

Downloaded from www.Manualslib.com manuals search engine

LTD HEATER PARTS

AXIAL PROPANE VAPOR & NATURAL GAS PIPETRAIN

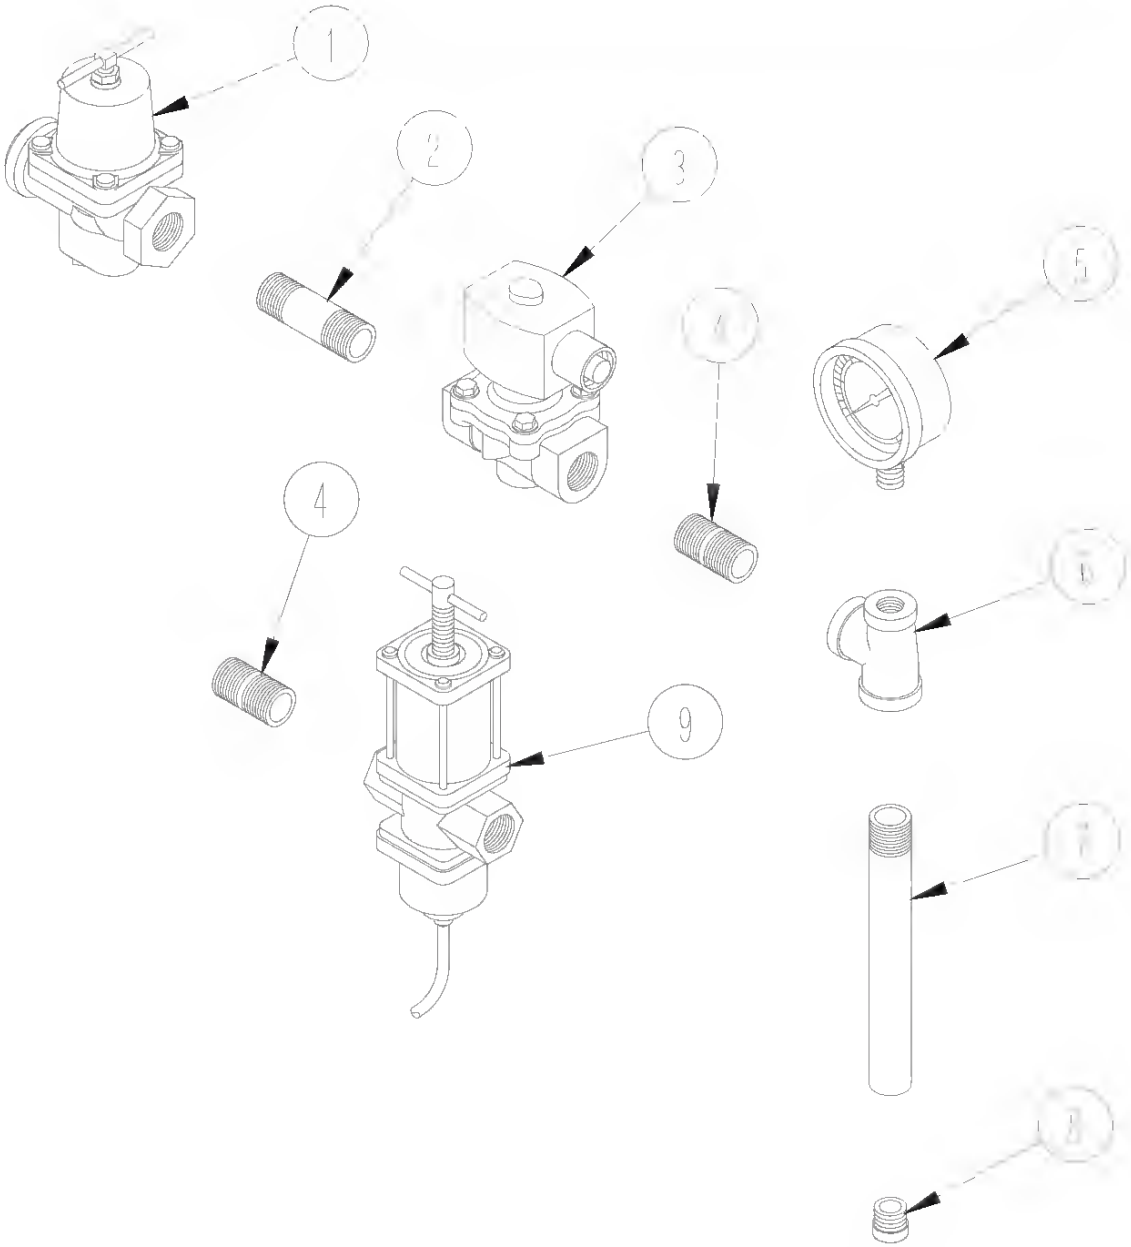

Key	Part Number	Description
1	HH-1077	1/2" regulator
2	HH-3670	1/2" x 2-1/2" nipple
3	TFC-0032	1/2" solenoid
4	HH-2029	1/2" x 1-1/2" nipple
5	HH-2984	1/4" gauge 30PSI
6	S-3853	1/2" x 1/4" x 1/2" tee
7	HH-1083	18/24/28" Orifice pipe
8	CD-0149	5/64" Orifice plug (propane)
8	HF-7085	9/64" Orifice plug (natural gas)
9	HH-2653	Modulating valve

Downloaded from www.Manualslib.com manuals search engine

Camera Function

Rear Camera Function:
The unit is "camera ready." Before accessing any camera features, you must install a rear video camera. When the camera is not installed and the function is accessed by the gear selector being placed in reverse or the unit's menu, touching the **Camera** icon produces no response. When the camera is installed, the rear view image of what is behind the vehicle will appear when the vehicle's gear selector lever is placed in reverse. When the lever is removed from the reverse position, the unit will return to the previous screen.

The rear camera image can be adjusted from the "Setup" menu under the "Video" submenu. The image can be changed from normal to mirror image.

Downloaded from www.Manualslib.com manuals search engine

Micro-wave solo operation

Defrosting

Type/quantity	Remarks/hints	Power ◿	Time/ min. 850 W	Standing time (min.)
Meat				
Whole meat (500 g)	Turn once. Cover fatty lean parts with aluminium foil after 1st half of de frosting time	2–3	10–12	10–15
Steaks (per 200 g)	During defrosting time in oven, turn once	2–3	3–4½	5–10
Mixed chopped meat (500 g)	Remove defrost chopped meat after 10 min.	2–3	10–12	5–10 10–15 (750 W)
Goulash (per 500 g)	See chopped meat	2–3	10–12	10–15
Poultry				
Chicken (around 1 kg)	During defrosting time in oven, turn once Cover legs with aluminium foil after 1st half of de-frosting time	2–3	25–30	10–20
Duck (1,5–2 kg)	See above	2–3	25–35	40–60

Downloaded from www.Manualslib.com manuals search engine

Notes on the roasting tables

Information is given in the table on suitable oven functions, temperature settings, cooking times and shelf positions for various types of meat. The cooking times are only for guidance.

- We recommend that only meat and fish **with a minimum weight of 1kg** should be roasted or baked in the oven.
- In general, conventional is particularly suitable for cooking very lean meat such as fish or game. For all other types of meat (particularly poultry) we recommend the rothitherm function.
- The cooking time required is dependent on the type and quality of the meat.
- To stop meat juices or fat burning onto dishes or the oven, we recommend adding a little liquid to the roasting dish
- Turn the roast after approx. 2/3 of the cooking time.

Switch off the oven 10-15 minutes before the end of the cooking time to make use of the residual heat.

Downloaded from www.Manualslib.com manuals search engine

وظيفة دفتر الاملاحظات

كيف تستخدم وظيفة دفتر الملاحظات:

اذا اردت عرض الرسالة عندما يكون التلفزيون في وضع تشغيل

الخطوة	اضغط الزر		النتيجة على الشاشة
1	C+/C- V-/V+	حرّك المؤشر لاختيار الاشارة	
2	OK	اضغط الزر لتحويل الاشارة من وضع الى وضع كما هو معروض	

اذا اردت عرض الرسالة في وقت محدد

الخطوة	اضغط الزر		النتيجة على الشاشة
1	C+/C- V-/V+	حرّك المؤشر لاختيار الاشارة	
2	OK	اضغط الزر لتحويل الايقاف على 0.00	
3	C+/C-	اضبط الوقت المرغوب، مثال 17.40	

ملاحظات:

- يجب ان يعتمد ضبط الوقت داخل دفتر الملاحظات على ضبط الوقت داخل قائمه **الوقت** لقائمة المؤقت TIMER يجب ان يكون ضبط الوقت لعرض الرسالة داخل دفتر الملاحظات بعد الوقت المضبوط داخل قائمة **الوقت**.

Downloaded from www.Manualslib.com manuals search engine

Unpacking

Slide out the polythene bag with the polystyrene stuffing before using the appliance. .

Pull off adhesive strips from inside machine on top of drum.

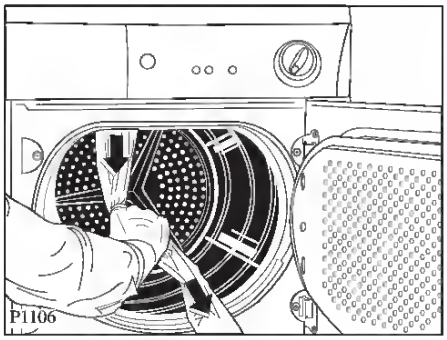

Special accessory

You can obtain the following special accessory through the AEG customer service organisation or from your dealer:

Kit Washing/drying column

With this kit you can combine your dryer with any LAVAMAT automatic washing machine to a washing and drying column. The appliances are stacked in space-economising manner in this arrangement, the washing machine at the bottom and the dryer at the top.
It should be possible to stack your new dryer on top of a front loading washing machine with cover's depth between 48 and 60 cm.
Read carefully the instructions supplied with the kit.

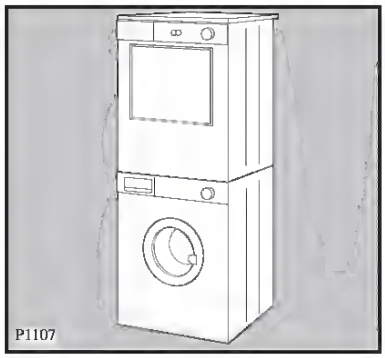

Door reversal

To make it easier to load or unload the laundry the door can be reversed.
This operation must be carried out by qualified personnel.
Please contact the nearest Service Force Centre. This is a chargeable option.

Downloaded from www.Manualslib.com manuals search engine

product where people will walk on the cord.

- If an extension cord is used with this product, make sure that the total ampere rating of the equipment plugged into the extension cord does not exceed the extension cord ampere rating. Also, make sure that the total rating of all products plugged into the wall outlet does not exceed the fuse rating.
- Do not overload a power outlet, strip or receptacle by plugging in too many devices. The overall system load must not exceed 80% of the branch circuit rating. If power strips are used, the load should not exceed 80% of the power strip's input rating.
- This product's AC adapter is equipped with a three-wire grounded plug. The plug only fits in a grounded power outlet. Make sure the power outlet is properly grounded before inserting the AC adapter plug. Do not insert the plug into a non-grounded power outlet. Contact your electrician for details.

Warning! The grounding pin is a safety feature. Using a power outlet that is not properly grounded may result in electric shock and/or injury.

Note: The grounding pin also provides good protection from unexpected noise produced by other nearby electrical devices that may interfere with the performance of this product.

- The system can be powered using a wide range of voltages: 100 to 120 or 220 to 240 V AC. The power cord included with the system meets the requirements for use in the country/region where the system was purchased. Power cords for use in other countries/regions must meet the requirements for that country/region. For more information on power cord requirements, contact an authorized reseller or service provider.

Product servicing

Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risks. Refer all servicing to qualified service personnel.

Unplug this product from the wall outlet and refer servicing to qualified service personnel when:

- The power cord or plug is damaged, cut or frayed.

Downloaded from www.Manualslib.com manuals search engine

30 One-Touch Recording

A One-Touch Recording (OTR) is an immediate timed recording from 30 minutes to eight hours long.
Before you begin, make sure:

- Channels are set. *Details are on page 10.*
- A tape is in the TV/VCR. The record tab must be intact.

1

Use the CH(annel) ▲/▼ buttons or the Number buttons to select the channel you want to record.

2

Press the SPEED button until the desired recording speed (SP or SLP) appears on the screen. *Details are on page 29.*

3

Press the REC(ord)/OTR button repeatedly until the desired recording length appears in the upper right corner of the screen. Recording will begin immediately. The Record light will appear.



4

To stop an OTR before recording is finished, press the STOP/EJECT button on the TV/VCR.
Or, press the REC(ord)/OTR button, then press the CLEAR button, then press the STOP/▼ button on the remote control.
If the end of a tape is reached during an OTR, recording will stop. The TV/VCR will turn itself off and eject the tape. The Record light will flash rapidly.
The TV/VCR will turn off at the end of the OTR.

4

Press the STOP/EJECT button on the TV/VCR to stop the OTR.

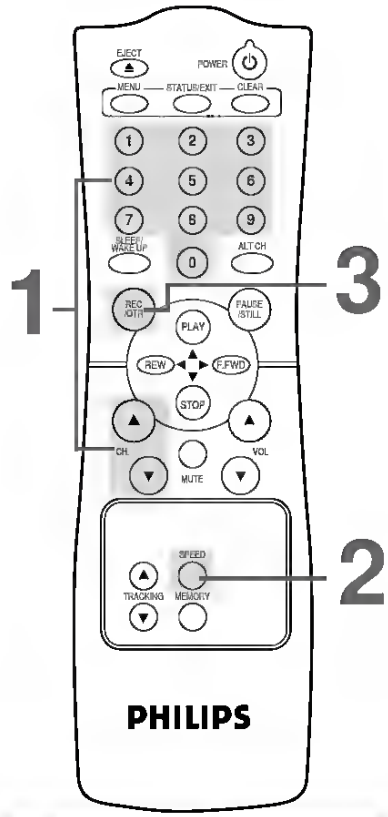

Helpful Hints

- *To check the time remaining for an OTR, press the STATUS/EXIT button.*
- *To change the recording length while an OTR is in progress, press the REC(ord)/OTR button until the desired recording length appears on the screen.*
- *You can not pause an OTR.*
- *To cancel an OTR but continue recording, press the REC(ord)/OTR button, then press the CLEAR button.*
- *You cannot record if DEFEAT RECORDING is ON. Details are on page 36.*
- *You can change the tape speed with the SPEED button while a recording is in progress, but some distortion may appear on the tape.*

Downloaded from www.Manualslib.com manuals search engine

1 Select AP Mode in the LAN/WiFi setting, and the projector plays an AP role. You can tap "eDisplay" to see below splash screen.

Projector Name(SSID) : AcerProjector001
WiFi IP : 192.168.100.10
Security : None (default)
LAN IP : 0.0.0.0 (if no LAN cable plugged in)

Check Projector ID (if enabled, a 4-digit random number will display on the upper-left corner of the screen), Projector Name (SSID, default name is AcerProjector), Server IP (default is 192.168.100.10) and Security (default is None).

2 Choose Client Mode in the LAN/WiFi setting and you will see below items. Please connect to an available AP and input password if necessary.

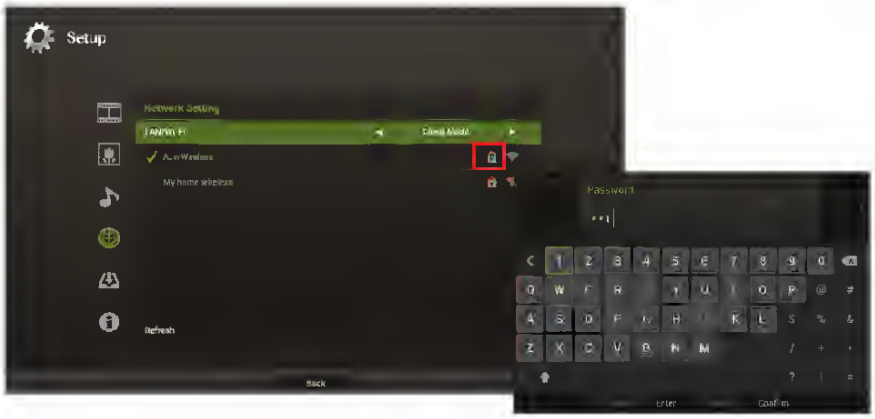

Then splash screen displays with below information.

Connected AP Name(SSID) : Depended
Client IP : Depended
Security : Depended
LAN IP : 0.0.0.0 (if no LAN cable plugged in)

In Client Mode, you can project the screen from your tablet or smartphone to the projector by using the application "eDisplay" and access to Internet as well.

Downloaded From projector-manual.com Acer Manuals

Downloaded from www.Manualslib.com manuals search engine

config-update operation ... 2-25
config-update start ... 2-25
config-update time ... 2-25
config-update url ... 2-25
config-update weekday ... 2-25
config-version ... 2-53
console authentication ... 2-18
contact ... 2-148
control method ... 2-86
controlled network ... 2-9
country code ... 2-167
credentials ... 2-98
daily restriction ... 2-139
data rate ... 2-110
New default ... 2-187
delete ip-qos profile all ... 2-111
delete ip-qos profile ... 2-111
dhcp mode ... 2-18
dhcp public ip default lease period ... 2-10
dhcp public ip subnet ... 2-10
New dhcp relay access access network ... 2-21
dhcp relay access centralized clients ... 2-21
dhcp relay access lan ... 2-21
dhcp relay active ... 2-115
dhcp relay circuit id ... 2-115
dhcp relay circuit id ... 2-20
New dhcp relay extend internet network ... 2-22
dhcp relay extend internet port ... 2-21
dhcp relay remote id ... 2-115
dhcp relay remote id ... 2-21
dhcp relay subnet ... 2-115
dhcp relay ... 2-115
dhcp relay ... 2-20
dhcp server access centralized clients ... 2-20
dhcp server access lan ... 2-20
dhcp server controller discovery ... 2-19
dhcp server controller ... 2-19
dhcp server default domain name ... 2-19
dhcp server default lease period ... 2-19
dhcp server default permanent lease period ... 2-19
dhcp server dns ... 2-116
dhcp server gateway ... 2-116
dhcp server logout html user ... 2-20
dhcp server range ... 2-116
dhcp server subnet ... 2-116
dhcp server ... 2-116
dhcp server ... 2-19
disassociate controlled-ap wireless client ... 2-8
discovery protocol device-id ... 2-44
discovery protocol ... 2-44
discovery provisioning ... 2-169
distance ... 2-170
dns domain name ... 2-168
dns domain ... 2-129
dns name ... 2-168
dns provisioning ... 2-168
dns server ... 2-129
dns server ... 2-169
dot11 automatic frequency period ... 2-171
dot11 automatic frequency time ... 2-171
dot11 automatic frequency ... 2-171
dot11 automatic transmit-power period ... 2-172
dot11 automatic transmit-power ... 2-172
dot11 mode ... 2-173
dot11 ... 2-170
dot11n channel extension ... 2-174
dot11n channel width ... 2-174
dot11n guard interval ... 2-174
dot11n mac protection ... 2-175
dot11n mimo ... 2-174
dot1x authentication ... 2-102
dot1x authentication ... 2-182
New dot1x radius accounting start delay ... 2-51
dot1x reauth period ... 2-155
dot1x reauth period ... 2-52
dot1x reauth terminate ... 2-155
dot1x reauth terminate ... 2-52
dot1x reauth ... 2-155
dot1x reauth ... 2-52
dot1x session page ... 2-103
dot1x supplicant timeout ... 2-156
dot1x supplicant timeout ... 2-52
dot3-tlv-enable ... 2-189
dual radio binding ... 2-162
duplex ... 2-89
duplex ... 2-91
New duplex-mode ... 2-118
dynamic key interval ... 2-155
dynamic key interval ... 2-53
dynamic key ... 2-155
dynamic key ... 2-52
dynamic mode ... 2-177
dynamic vlan ... 2-182
eap ... 2-167
egress rate ... 2-182
egress unauthenticated ... 2-100
egress vlan ... 2-145
egress vlan ... 2-162
egress vlan ... 2-162
egress vlan ... 2-80
egress vlan ... 2-86
enable console password reset ... 2-18
enable vsc services ... 2-157
enable ... 2-3
encryption key 1 ... 2-101
encryption key format ... 2-101
end force ... 2-128
end time ... 2-139
end time ... 2-86
end ... 2-11
end ... 2-117
New end ... 2-118
end ... 2-120
end ... 2-122
end ... 2-125
end ... 2-127
end ... 2-129
end ... 2-133
end ... 2-135
end ... 2-137
end ... 2-138
end ... 2-139
end ... 2-142
end ... 2-143
end ... 2-144
end ... 2-147
end ... 2-149
end ... 2-150
end ... 2-151
end ... 2-162
end ... 2-164
end ... 2-165

Figure 2–4 Global Predictor

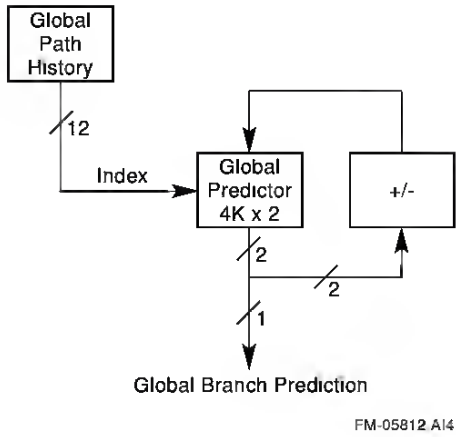

Choice Predictor

The choice predictor monitors the history of the local and global predictors and chooses the best of the two predictors for a particular branch. Figure 2–5 shows how the choice predictor generates its choice of the result of the local or global prediction. The 12-bit global path history (see Figure 2–4) is used to index a 4K entry table of 2-bit saturating counters. The value of the saturating counter determines the choice between the outputs of the local and global predictors.

Figure 2–5 Choice Predictor

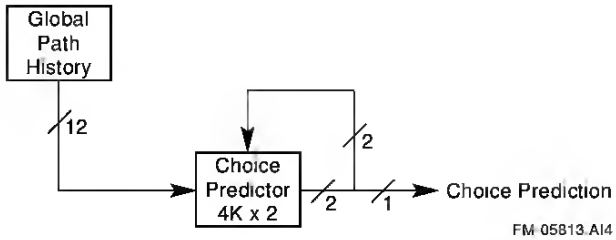

2.1.1.3 Instruction-Stream Translation Buffer

The Ibox includes a 128-entry, fully-associative instruction-stream translation buffer (ITB) that is used to store recently used instruction-stream (Istream) address translations and page protection information. Each of the entries in the ITB can map 1, 8, 64, or 512 contiguous 8KB pages. The allocation scheme is round-robin.

The ITB supports an 8-bit ASN and contains an ASM bit. The Icache is virtually addressed and contains the access-check information, so the ITB is accessed only for Istream references that miss in the Icache.

Istream transactions to I/O address space are UNDEFINED.

Downloaded from www.Manualslib.com manuals search engine

Removing the Bezel Blanks

To remove a bezel blank from the front bezel:

> **CAUTION:** Before removing the front bezel, make sure that the server is powered down, all cables are disconnected from the server, and the power cord is disconnected from the grounded AC.

1. Remove front bezel. See "Removing the Front Bezel" earlier in this chapter.
2. On the back side of the front bezel, pinch the tabs ❶ on either end of the bezel blank toward each other, then push the bezel blank ❷ through the front bezel.

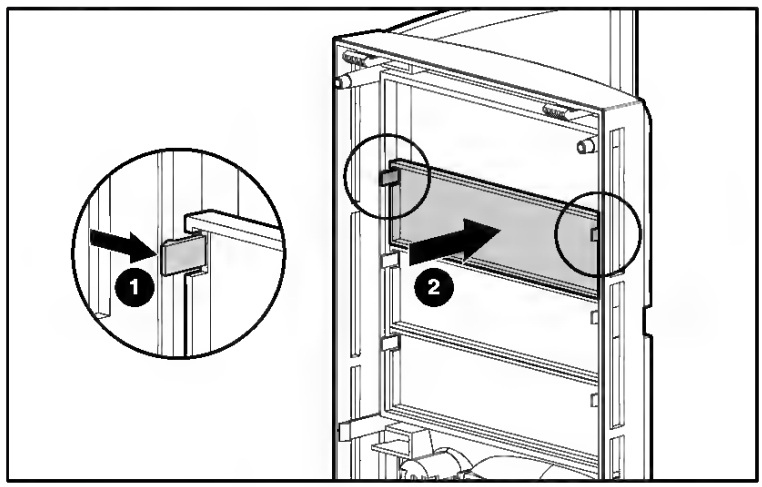

Figure 3-3. Removing a bezel blank

To replace a bezel blank, reverse the above procedure.

Downloaded from www.Manualslib.com manuals search engine

hP	**Pedal-Controlled Phaser** A phaser effect with its feedback controlled by the expression pedal.
t0→t9	**Tremolo** Varies the volume of the signal, creating a rising and falling effect. Higher values result in greater depth of variation.
tP	**Pedal-Controlled Tremolo** A tremolo effect with its depth controlled by the expression pedal.
r0→r9	**Ring Modulation** An effect that modulates the amplitude of the signal, giving it a metallic sound. Higher values result in greater modulation depth.
rP	**Pedal-Controlled Ring Modulation** Ring modulation with its depth controlled by the expression pedal.
y0→y9	**Cry** Creates an effect similar to that of a voice box, adding a human-like crying effect to the sound. Higher values result in greater intensity.
yP	**Pedal-Controlled Cry** A cry effect with its filter frequency controlled by the expression pedal.
S0→S9	**Random Sample and Hold Step Filter** For this effect, the filter cutoff frequency changes abruptly to a new psuedo-random value at a fixed time interval, producing an arpeggiator-like sound.
SP	**Pedal-Controlled Step Filter** A step filter with its depth controlled by the expression pedal.
A0→A9	**Slow Attack** Reduces the attack rate of the signal, slowing the rate at which the volume of the sound rises when you attack a string. Higher values result in higher sensitivity.
n0→n9	**Auto Pan** Pans the signal back and forth from left to right at a constant rate determined by the PARAM setting. Higher values result in increased pan depth.

AEG Hausgeräte GmbH
Postfach 1036
D-90327 Nürnberg

http://www.aeg.hausgeraete.de

© Copyright by AEG

822 944 111-00- 0102/PRO

Subject to change without notice

Downloaded from www.Manualslib.com manuals search engine

Cooking with the Crunch function

Description	Weight (gram)	Grill output power	Time (min.)	Notes[1)]
Fish	300g	GP3	3-6	Turn over halfway through cooking
Vegetables	500g	GP2	5-15	Brush with oil. Season with salt and pepper. Turn over halfway through cooking
Snacks [2)] Cheese on Toast Toasted snacks Pizza	2 slices	GP3	5-10	Turn all foods except pizza, halfway through cooking time.
Delicate cakes & Pastries [2)]	Approx 500g	GP2	5-10	Check frequently during cooking process

1) Use only the CRUNCH dish with the CRUNCH function directly on the turntable, never use with wire rack.

2) First pre-heat the CRUNCH dish for 2 minutes

The grill temperatures and times given are for guidance only, as they are dependent upon the type and quality of the food.

Downloaded from www.Manualslib.com manuals search engine

Integrated Management Display (IMD)

To remove the IMD:

1. Perform the preparation procedures. See "Preparation Procedures" earlier in this chapter.
2. Open the front bezel door (tower model only).
3. Remove the fixed front bezel. See "Fixed Front Bezel" earlier in this chapter.
4. Remove the front fans. See "Fans" earlier in this chapter.
5. Remove the drive cage assembly. See "Drive Cage Assembly" earlier in this chapter.
6. Disconnect the IMD cable from the IMD extension cable .

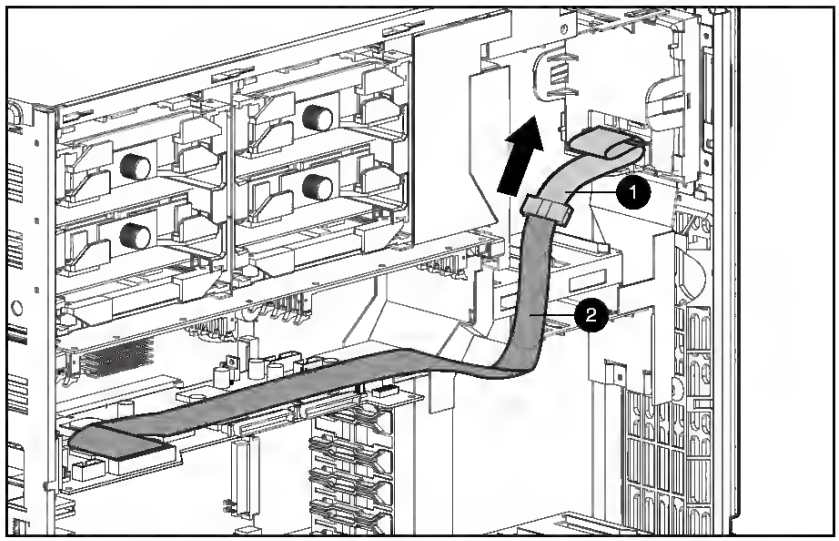

Figure 2-17. Disconnecting the IMD cable from the IMD extension cable

Downloaded from www.Manualslib.com manuals search engine

9. Circuit Descriptions, Abbreviation List, and IC Data Sheets

Index of this chapter:

9.1 Basic Hardware Descriptions
9.2 Functional Description
9.3 Abbreviation List

9.1 Basic Hardware Descriptions

9.1.1 ST92195C/D Microcontroller

General Features

- Register File based 8/16 bit Core Architecture with RUN, WFI, SLOW, HALT modes
- 00 to +700C operating temperature range
- Up to 24MHz operation @ 5V (10%)
- Min. Instruction cycle time: 165ns @ 24MHz
- 48, 56, 84, 84 or 96 Kbytes ROM
- 256 bytes RAM of Register file (accumulators or index registers)
- 256 to 512 bytes of on-chip static RAM
- 2 or 8 Kbytes of TDSRAM (Teletext and Display Storage RAM)
- 28 fully programmable I/O pins
- Serial Penpheral Interface
- Flexible Clock controller for OSD, Data Slicer and Core Clocks running from a single low frequency external crystal
- Enhanced display controller with 26 rows of 40/80 characters
  - 2 sets of 512 characters, 10x10 dot matrix, definable by user
  - Serial and Parallel attributes
  - 4/3 and 16/9 supported in 50/60Hz and 100/120Hz mode
  - Rounding, fringe, double width, double height, scrolling, cursor, full background colour, half intensity colour, translucency and half-tone modes
- Teletext unit, including DataSlicer, Acquisition unit and up to 8Kbytes RAM for data storage
- VPS and Wide Screen Signalling slicer
- Integrated Sync Extractor and Sync Controller
- OSD

On Screen Display

The human interface is provided by the On Screen Display module, this can produce up to 26 lines of up to 80 characters from a ROM defined 512-character set. The character resolution is 10x10 dot. Four character sizes are supported. Serial attributes allow the user to select foreground and background. Parallel attributes can be used to select additional foreground and background colours and underline on a character-by-character basis.

Teletext and Display Storage RAM

The Internal Teletext and Display storage RAM can be used to store Teletext pages as well as Display parameters.

Teletext VPS and WSS Data Slicers

The three on-board data slicers using a single external crystal are used to extract the teletext, VPS and WSS information from the video signal. Hardware hamming decoding is provided.

Voltage Synthesis Tuning Control

14-bit Voltage Synthesis using the PWM /BRM technique can be used to generate tuning voltages for TV set applications. The tuning voltage is output on one of two separate output pins.

PWM Dutput

Control of TV settings can be made with up to eight 8-bit PWM outputs, with a maximum frequency of 23.437Hz at 8-bit resolution (INTCLK = 12MHz). Low resolutions with higher frequency operation can be programmed.

Serial Peripheral Interface (SPI)

The SPI bus is used to communicate with external devices via the SPI, or I^2C bus communication standards. The SPI uses a single data line for data input and output. A second line is used for a synchronous clock signal.

Standard Timer

Downloaded from www.Manualslib.com manuals search engine

4. **EZCast** (draadloze schermspiegeling voor Android en iOS apparaten)

Stap 1 Installeer de EZCast app via Google Play of App Store

Stap 2 Kies EZCast vanuit het hoofdmenu om toegang te krijgen tot de interface voor EZCast schermspiegeling.

Stap 3 Schakel WLAN aan op de smart phone en maak verbinding met het netwerk Beam-XXXXXXXX met het op de projector getoonde wachtwoord

Stap 4 Voer de EZCast app uit en maak verbinding met de projector

Stap 5 EZCast app maakt toegang mogelijk tot functies zoals EZChannel, Foto, Camera, Muziek, Video, Web en Cloud Opslag.

erenigbaarheid: iOS 10 & 11, Android 5.0 & above

152963991en per CH.qxp 03/08/2004 13.39 Pagina 41

Water outlet hose connection

The end of the drain hose can be connected in the following ways:

1. To the sink outlet spigot, securing it to the underside of the work surface. This will prevent waste water from the sink running into the machine.
2. Hooked over the edge of the sink using the special curved plastic guide *(if provided with the machine)*.
3. To a stand pipe provided with vent-hole, minimum internal diameter 4 cm.

The waste connection must be at a height of between 30 cm (minimum) and 100 cm (maximum) from the bottom of the dishwasher.

The drain hose can face either to the right or left of the dishwasher

Ensure the hose is not bent or squashed as this could prevent or slow down the discharge of water.

The sink plug must not be in place when the machine is draining as this could cause the water to siphon back into the machine.

If you use a drain hose extension it must be no longer than 2 metres and its internal diameter must be no smaller than the diameter of the hose provided.

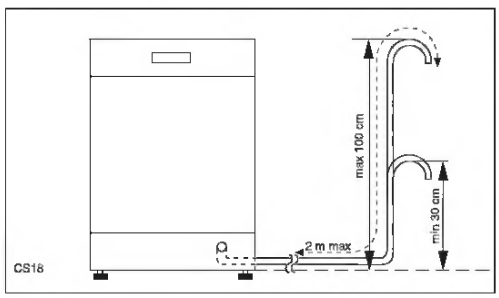

Likewise the internal diameter of the couplings used for connections to the waste outlet must be no smaller than the diameter of the hose provided.

Attention!
Our oppliances ore supplied with o security device to protect ogoinst the return of dirty woter bock into the mochine.
If the spigot of your sink hos o "no return volve" incorporoted this con prevent the correct droining of your dishwosher.
We odvise you therefore to remove it.

Downloaded from www.Manualslib.com manuals search engine

AVERTISSEMENT

POUR REDUIRE LE RISQUE DE COURT-CIRCUIT OU DE CHOC ELECTRIQUE, NE PAS EXPOSER CET APPAREIL A LA PLUIE OU A L'HUMIDITE.

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

"ATTENTION:POUR REDUIRE LE RISQUE DE CHOC ELECTRIQUE, NE PAS ENLEVER LE COUVERCLE (NI LE DOS).
CET APPAREIL NE CONTIENT PAS DE PIECES REPARABLES PAR L'UTILISATEUR.
POUR TOUTE REPARATION, S'ADRESSER A UNE PERSONNE QUALIFIEE."

Signification des symboles graphiques:

L'éclair portant une flèche, situé dans un triangle équilatéral, sert à prévenir l'utilisateur de la présence d'une "tension dangereuse" non isolée à l'intérieur de l'appareil, assez élevée pour constituer un risque d'électrocution.

Le point d'exclamation situé dans un triangle équilatéral, sert à prévenir l'utilisateur de la présence d'instructions importantes concernant l'utilisation et l'entretien (ou la réparation) de l'appareil dans le manuel qui accompagne ce dernier.

Relavé du propriétaire
Pour plus de commodité, noter le numéro de modèle et le numéro de série (ces numéros se trouvent au dos de l'appareil) dans les cases ci-dessous. Prière de mentionner ces numéros quand on contacte un distributeur Aiwa en ces de difficulté.

N° de modèle	N° de série (N° de lot)
AV-D50	

PRECAUTIONS

Lisez ettentivement et complètement le mode d'emploi avant d'utiliser l'ampli-tuner et conservez-le pour toute référence future. Respectez tous les avertissements et consignes mentionnés dans le mode d'emploi, ainsi que les conseils concernant la sécurité.

Installation

1 **Eau et humidité** — Ne pas utiliser l'ampli-tuner près d'une baignoire, d'un lavabo, d'une piscine ou de tout autre endroit similelre.
2 **Chaleur** — Ne pas utiliser l'ampli-tuner près d'une source de chaleur, comme une sortie d'air chaud, un chauffage, ou autre appareil produisant de la chaleur. Il ne doit pas non plus être exposé à des températures inférieures à 5°C (41°F) ou supérieures à 35°C (95°F).
3 **Installation** — Installez l'ampli-tuner sur une surface plane, de niveau.
4 **Ventilation** — Laissez un espace suffisant tout autour de l'ampli-tuner pour garantir une bonne ventilation, soit environ 10 cm (4 po.) à l'arrière et au-dessus de l'empli-tuner et 5 cm (2 po.) sur les deux côtés.
- Ne pas poser l'ampli-tuner sur un lit, une couverture ou toute autre surface similaire qui pourrait bloquer les orifices de ventilation.
- Ne pas installer l'ampli-tuner dans une étagère, un plecard ou un meuble où le ventilation est insuffisante.

5 **Objets et liquide** — Veillez à ce qu'aucun objet ni liquide ne pénètre dans les orifices de ventilation de l'ampli-tuner.
6 **Chariots et supports** — Quand vous installez l'ampli-tuner sur un support ou un chariot, déplacez-les lentement.
A ceuse d'arrêts subits, de mouvements brusques et de surfaces inégales, l'ampli-tuner ou le chariot peuvent être renversés.

7 **Fixation au mur ou au plafond** — L'ampli-tuner ne doit pas être installé au mur ou au plafond.

Electricité

1 **Sourcea d'alimentation** — Raccordez l'ampli-tuner seulement à la source d'alimentation spécifiée dans le mode d'emploi et indiquée sur l'ampli-tuner proprement dit.
2 **Polarisation** — Par mesure de sécurité, certains appareils sont équipés d'une fiche secteur polarisée qui ne rentre dens la prise murale que dens un seul sens. S'il n'est pes possible d'insérer la fiche dans la prise, essayez dans l'autre sens. S'il n'est toujours pas possible d'insérer la fiche dans la prise, faites appel à un électricien pour remplacer la prise qui est probablement trop vieille. Ne pas modifier la fiche polarisée, elle ne remplirait plus son but.
3 **Cordon d'alimentation secteur**
- Quand vous débranchez le cordon d'allmentation secteur, tirez sur la fiche et non pas sur le cordon.
- Ne jamais toucher la fiche secteur avec des mains humides afin d'éviter les risques d'incendie ou d'électrocution.
- Les cordons d'alimentation doivent être fixés correctement pour éviter qu'ils ne soient pliés, coincés ou piétinés. Feltes particulièrement attention au cordon reliant l'ampli-tuner à la prise secteur.
- Evitez de surcharger les fiches et cordons de prolongation au-delà de leur capacité afin d'éviter tout risque d'incendie ou d'électrocution.

4 **Cordon de prolongation** — Afin d'éviter tout risque d'électrocution, ne pas utiliser de fiche secteur polarisée avec un cordon de prolongation, douille ou autre type de prise à moins que la fiche polarisée ne soit complètement insérée sans laisser les lames à découvert.

Downloaded from www.Manuatstib.com manuals search engine

Weights and towing data kg

	Gross vehicle weight	Max. towing weights Trailer with brakes (without brakes)
1.4i 16v (100PS)	1890	700 (670)
1.3CDTi 16v (95PS) ecoFLEX	1785	–
1.6CDTi 16v (136PS) ecoFLEX	2040	1150 (730)
1.7CDTi 16v (110PS) auto	2060	1200 (740)

Please note: For 1.4i 16v (100PS) and 1.3CDTi 16v (95PS) ecoFLEX models fitted with air conditioning 15kg must be added to gross vehicle weight. **Gross vehicle weight** is the total permissible weight of the vehicle including passengers and their luggage. The **maximum roof rack loading** should not exceed a total of 60kg. The **maximum towing weights** are based on the ability of the car, with two occupants of 75kg each, to restart on a 12% gradient, which is approximately 1 in 8.3, at sea level. At altitudes above 1500 metres, the engine output may drop with a corresponding reduction in towing capability. Any extra weight, such as luggage or additional passengers, should be deducted from the maximum towing weight. With a trailer fully loaded, **maximum noseweight** should not exceed 75kg. Always fit Opel towing attachments and accessories available from your Opel dealer. They are designed specifically for Opel models and carry a 24-month guarantee.

Tyre rating

Tyre size	Fuel efficiency group	Wet grip performance	External noise	
			Measured (dB)	Group
195/65 R 15	C-E	B-E	71	
205/55 R 16	B-F	B-F	68-72	
225/45 R 17	C-E	B	68-72	
225/40 R 18	E	B	71	

Tyre rating according to EU Regulation 1222/2009

Brakes

- Electric parking brake
- Anti-lock Braking System (ABS)
- Asbestos-free friction material
- Dual circuit, diagonally split, dual rate servo-assisted system
- Low brake fluid level warning light
- Plastic-coated brake pipes

1.4i 16v/1.3CDTi 16v
Front ventilated discs: 280mm diameter
Rear discs: 264mm diameter

1.6CDTi 16v/1.7CDTi 16v
Front ventilated discs: 308mm diameter
Rear discs: 264mm diameter

Exterior dimensions millimetres (inches)

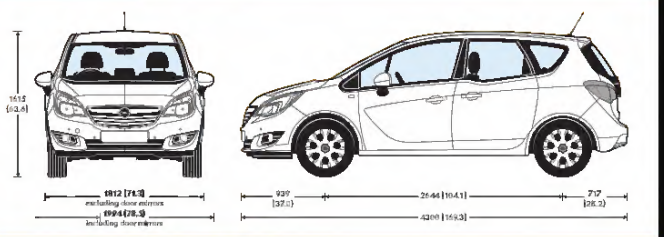

Loadspace dimensions millimetres (inches)

Maximum load length behind front seat	1642 (64.6)
Maximum load area width	1052 (41.4)
Maximum load area height	803 (31.6)
Maximum tailgate aperture width	1086 (42.8)
Maximum tailgate aperture height	791 (31.1)

Luggage capacities* litres (cu.ft.)

Three rear seats configuration	
To upper edge of rear seat back	397 (14.0)
Rear seats folded flat (to upper edge of front seat back)	916 (32.3)
Rear seats folded flat (to roof)	1496 (52.8)

* = Measured using the ECIE method.

Downloaded from www.Manualslib.com manuals search engine

Using PC Camera

Installing the software

The PC camera software is included in the camera driver, and therefore you should install the driver before using the PC camera function. If you have not yet installed the driver, please see page 36 for details on the installation.

Starting the application

1 Connect the camera to your computer.

Connect the camera to your computer using the accessory USB cable.

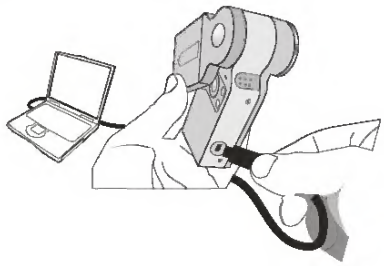

2 Turn on the camera and switch to Live mode.

Turn on your camera, and the LCD will display as illustrated. Press the **Up** or **Down** (▲▼) button to select the Live Mode item, and then press the **Menu/OK** (**Menu/OK**) button to confirm.



If you want to use the Video Conferencing function, please install programs such as ***Netmeeting*** to serve the purpose.

Notice for Windows ME users:
When the indicated screen appears, please select **Automatic search for a better driver** and click **Next** to continue.

Add New Hardware Wizard
Windows has found the following new hardware:
USB Audio Device
Windows can automatically search for and install software that supports your hardware. If your hardware came with installation media, insert it now and click Next.
What would you like to do?
Automatic search for a better driver (Recommended)
Specify the location of the driver (Advanced)
< Back
Next >
Cancel

Downloaded from www.Manualslib.com manuals search engine